DWG. NO. BZ-1946-A REV. "B"

PART NO.: DMT-1206 S-NL

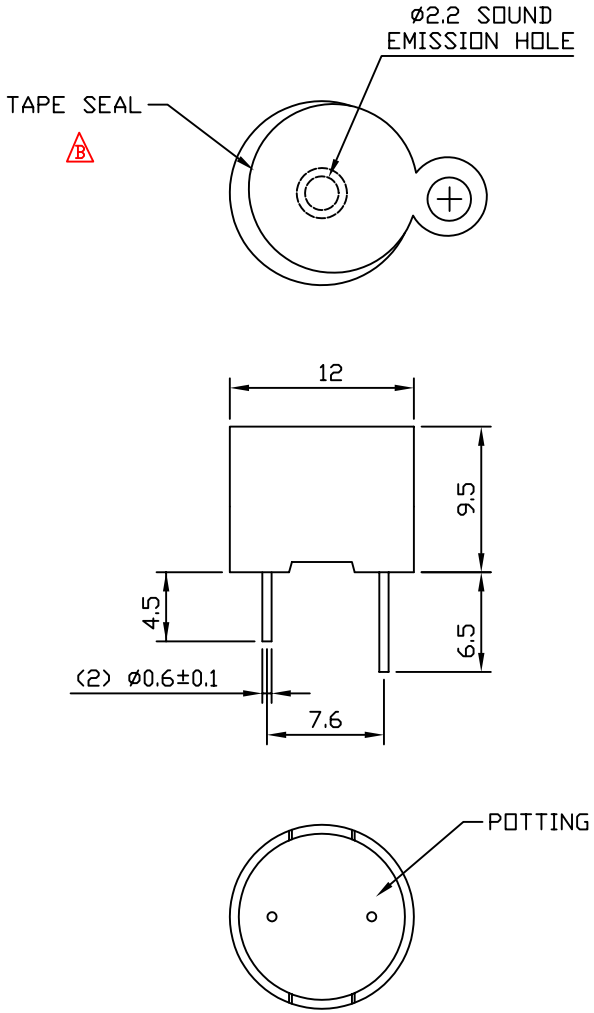

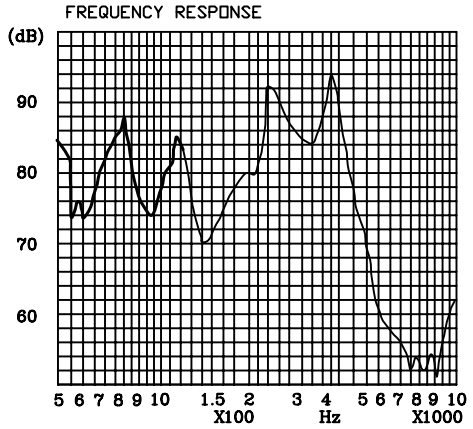

SPECIFICATIONS WITH CIRCUIT

MODEL NO:	DMT-1206-S-NL
RATED VOLTAGE DC (V):	6
OPERATING VOLTAGE DC (V):	4~8
CURRENT(mA):	MAX. 30
SOUND OUTPUT AT 10CM(dB):	MIN. 80
RESONANT FREQ. (Hz).	2,300
TEMPERATURE RANGE(°C):	-20 TO +70
WEIGHT(g):	2
DIMENSIONS(mm):	ø12X9.5H.

NOTE:
1. ALL DIMS ARE GIVEN IN MM.
2. PC PINS ARE ALSO AVAILABLE IN 3.3MM OR 2.92MM LENGTHS.
3. FLOW SOLDERABLE AND WASHABLE.

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
06-603	09/13/06	B	ADDED THE TAPE SEAL	BM	JY
06-363	05/19/06	A	CHANGED THE PART TO RoHS COMPLIANT	VF	JY

PROJECTION

SCALE NONE

TOLERANCE EXCEPT AS NOTED

DEC. INCHES N/A

DEC. MILLIMETERS ±0.3

ANG. N/A

RDI Research Develop Innovate

RDI, Inc. 400 Columbus Avenue Valhalla, NY 10595

TITLE: AUDIO ALERT-RoHS COMPLIANT

DR.	DATE	REF.
JOEY	6/18/04	P/N: DMT-1206 S-NL

CK.	PRE-	DRAWING NO.	SIZE	REV.
NL	BZ	1946	A	B

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.