DWG. NO. CO-4924-A REV. "-"

PART NO. 211-XX-PP-N-NL

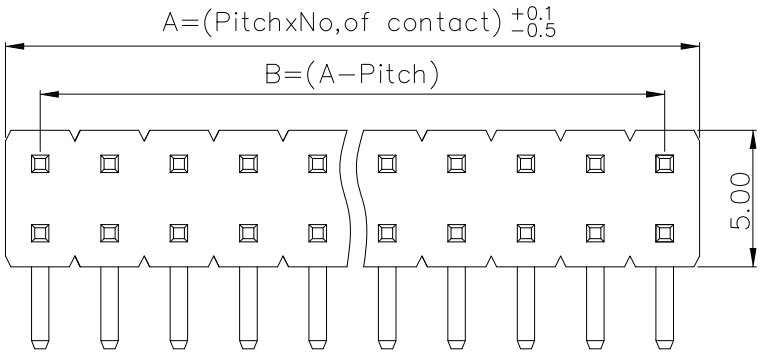

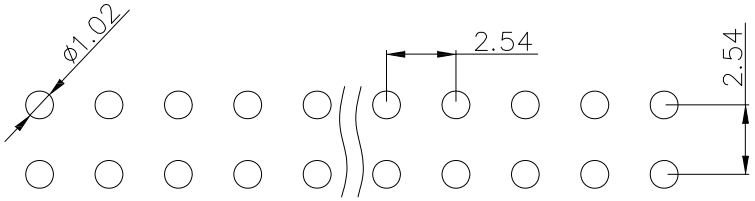

P.C.B. LAYOUT

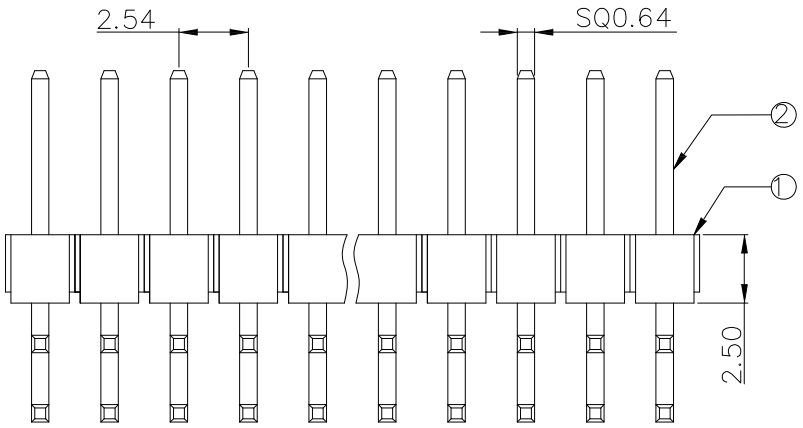

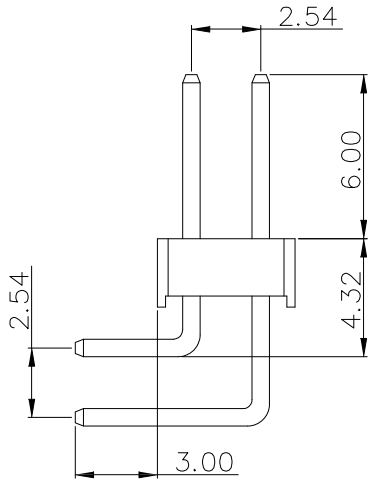

NOTES: ALL DIMS ARE IN mm

ITEM	Part name	Material	Description	Q'TY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds. Initial : 1000MΩ Min. After Test : 500MΩ Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20mΩ Max. After Test : 40mΩ Max.	XX

Temperature Rating : -40°C ~ +125°C
Dielectric Withstanding Voltage : 1000V AC / Min

L=13.9/18.9mm

RDI PN : 211-XX-PP-N-NL
XX= No of contacts : 02-80
PP= Plating : 00= Gold Flash, 01+ Selective gold flash,
15= 15µ" gold, 30= 30µ" Gold
N= NY-6T, UL94V-0

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

PROJECTION

SCALE N/A

TOLERANCE EXCEPT AS NOTED
DEC. MILLIMETERS
0.0±0.30
0.00±0.20
0.000±0.10
ANG. N/A

RDI Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

TITLE: Pin Header, 90°, 2.54mm pitch, RoHS Compliant

DR.	DATE	REF.	SHEET
Tina	07/16/19	P/N: 211-XX-PP-N-NL	1 OF 1

CK.	PRE-	DRAWING NO.	SIZE	REV.
BM	CO	4924	A	-

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.