DWG. NO. CO-4930-A REV. "-"

PART NO. 220-XX-PP-N-NL

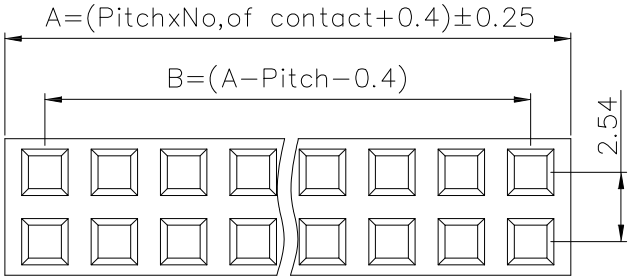


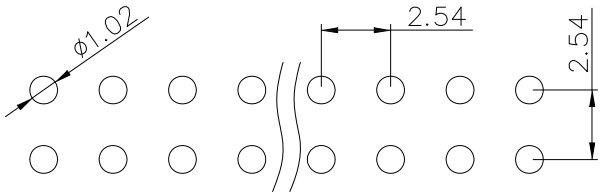


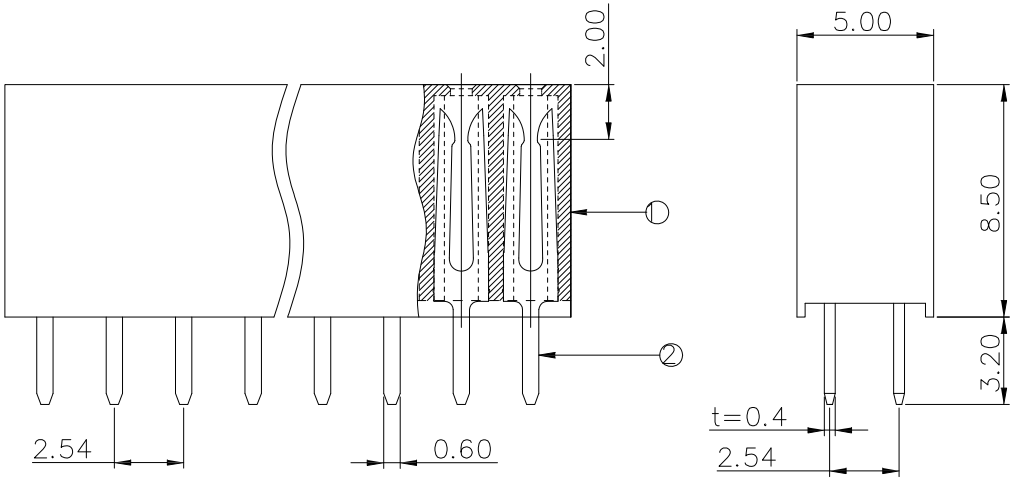


# P.C.B. LAYOUT

NOTES: ALL DIMS ARE IN mm

| ITEM | Part name | Material | Description | Q'TY |
|---|---|---|---|---|
| 1 | Housing | NY-6T<br>UL94V-0 | 260°C for 10 Seconds.<br>Initial : 1000MΩ Min.<br>After Test : 500MΩ Min. | 1 |
| 2 | Contact | Brass | Current Rating : 3.0A<br>Initial : 20mΩ Max.<br>After Test : 40mΩ Max. | XX |

Normal Force : 125 Grams Average.
Temperature Rating : -40°C ~ +125°C.
Dielectric Withstanding Voltage : 1000V AC / Min.

RDI PN : 220-XX-PP-N-NL
XX= No of contacts : 04-80
PP= Plating : 00= Gold flash, 01= Selective gold flash,
15= 15µ" gold, 30= 30µ" gold
N= NY-6T, UL94V-0

| | | | | | |
|---|---|---|---|---|---|
| PROJECTION | RDI Research Develop Innovate<br>RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549 | | | | |
| SCALE N/A | TITLE: Pin Header Receptacle, 180°, 2.54mm pitch, RoHS Compliant | | | | |
| TOLERANCE EXCEPT AS NOTED | DR. Tina | DATE 07/16/19 | REF. P/N: 220-XX-PP-N-NL | | SHEET 1 OF 1 |
| DEC. MILLIMETERS 0.0±0.30 0.00±0.20 0.000±0.10 | CK. BM | PRE- CO | DRAWING NO. 4930 | SIZE A | REV. - |
| ANG. N/A | THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST. | | | | |

| ECN# | DATE | SYM | REVISION RECORD | AUTH | BY |
|---|---|---|---|---|---|