


DIMENSIONS (UNIT: mm)

- (1) Piezoelectric Ceramics
- (2) Brass Plate

Figure 1.

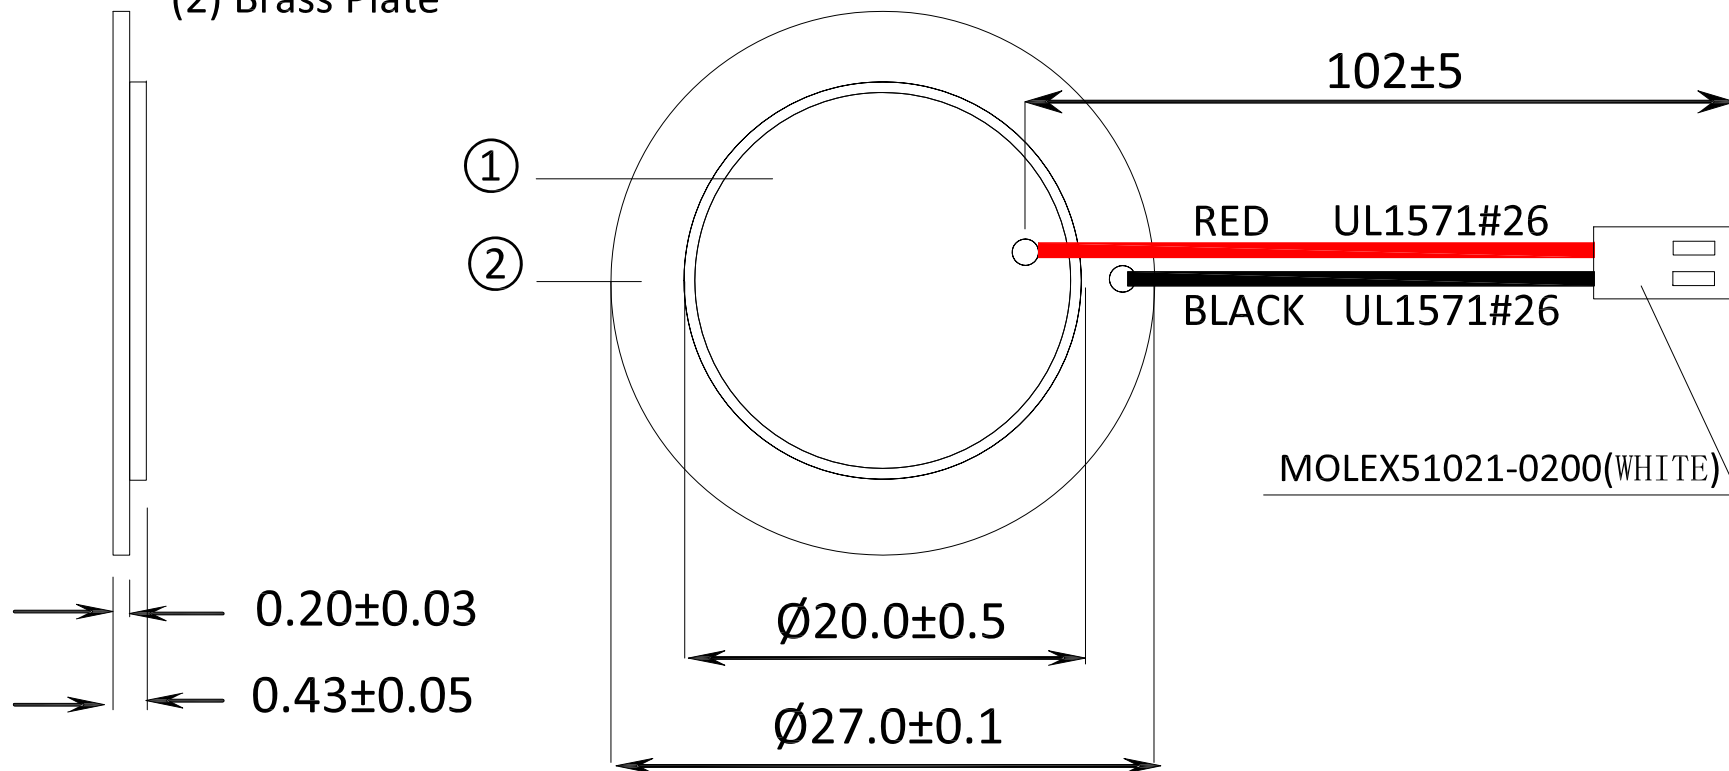

SCOPE : This specification is applied to the piezoelectric diaphragm.

SPECIFICATIONS (at 25°)

1	Resonant Frequency	3.5±0.5KHz
2	Resonant Resistance	400Ω max(without wire)
3	Main Capacitance	22,000pF±30% at 100Hz
4	Input Voltage	30Vp-p max
5	Operating Temperature	-20℃ ~ +60℃
6	Storage Temperature	-20℃ ~ +70℃
7	Dimension	as per Figure 1

NOTES: ALL DIMS ARE IN mm.

PROJECTION		RDI Research Develop Innovate RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549			
		TITLE Piezo buzzer assembly, 100mm leads, RoHS Compliant			
SCALE N/A		DR. Tina	DATE 10/20/16	REF. P/N: DMZ2736-4.0WL-C-NL	SHEET 1 OF 1
TOLERANCE EXCEPT AS NOTED		CK. BM	PRE- BZ	DRAWING NO. 4688	SIZE A
DEC. DIMENSION .XX±0.1 .XXX±0.05		REV. -			
ANG. ±5°		THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.			

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
------	------	-----	-----------------	------	----