DWG. NO. CO-4955-A REV. "_"

PART NO. MUSB-2005KLP-NL

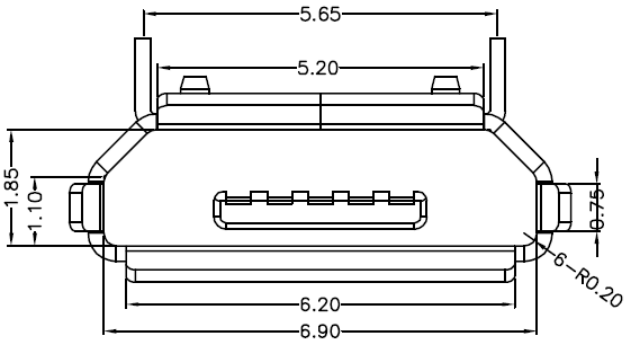

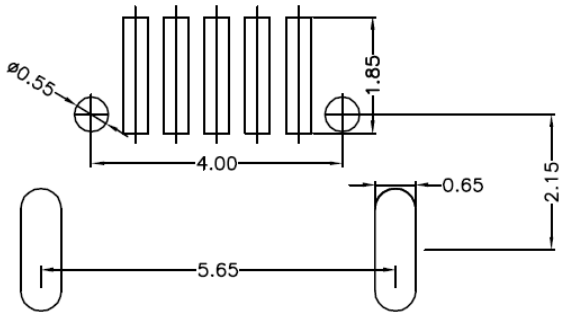

SPECIFICATIONS :

1. ELECTRICAL :

1.1 Current Rating : 0.5 A
1.2 Voltage Rating : 30V DC
1.3 Contact Resistance : 30 mΩ MAX
1.4 Insulation Resistance : 100 MΩ MIN
1.5 Dielectric Withstand Voltage :
250 V AC

2. MATERIAL :

2.1 Housing : LCP UL94V-0
2.2 Contact : C2680R-H, Nickel bottom,
Gold-Plated 1u"
2.3 Shell : C2680R-H Nickel-Plated 100u"

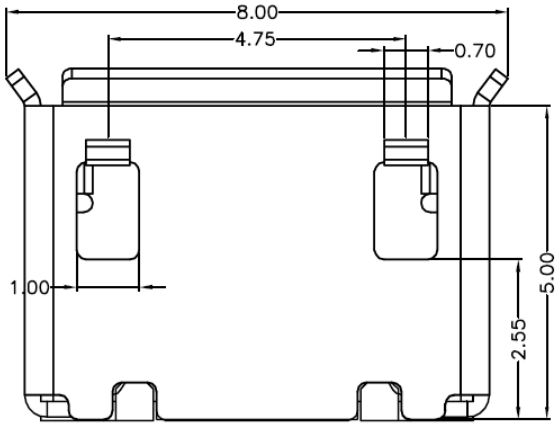

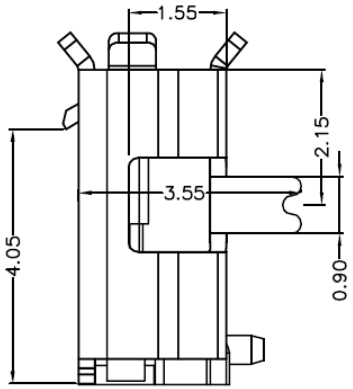

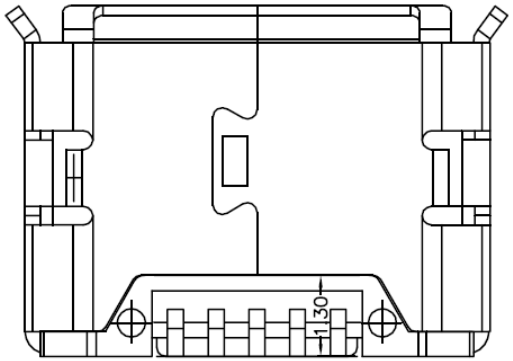

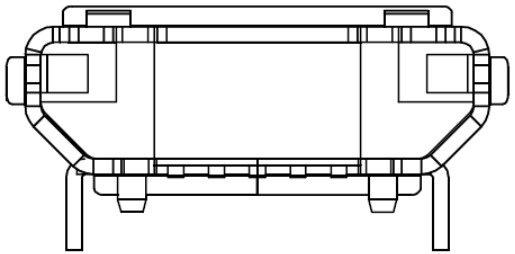

NOTE: ALL DIMS ARE IN mm.

PROJECTION	RDI Research Develop Innovate RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549			
SCALE UNDEFINED	TITLE: Micro 5P USB receptacle, 90°, SMT, RoHS Compliant			
TOLERANCE EXCEPT AS NOTED	DR. Tina	DATE 08/15/19	REF. P/N: MUSB-2005KLP-NL	SHEET 1 OF 1
DEC. MILLIMETERS .X±0.10 .XX±0.25 .XXX±0.35	CK. BM	PRE- CO	DRAWING NO. 4955 / SIZE A	REV. –
ANG. .X±5.0° .XX±3.0° .XXX±2.0°	THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.			

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY