

SPECIFICATIONS:

CONTACT RATING: DC 12V 0.5A.
 CONTACT RESISTANCE: 30mΩ max.
 MECHANICAL LIFE: 1,000 cycles.
 INSULATION RESISTANCE: 500MΩ min. at 500VDC.


MATERIALS:

HOUSING: Nylon 6/6 (UL94V-0).
 SLIDE HANDLE: Nylon 6/6 (UL94V-0).
 TERMINAL: Brass, gold over nickel plated.

Specifications and Dimensions subject to change

If your preferred product configuration is not shown, please contact our sales representative for custom design.

HOW TO ORDER SYSTEM

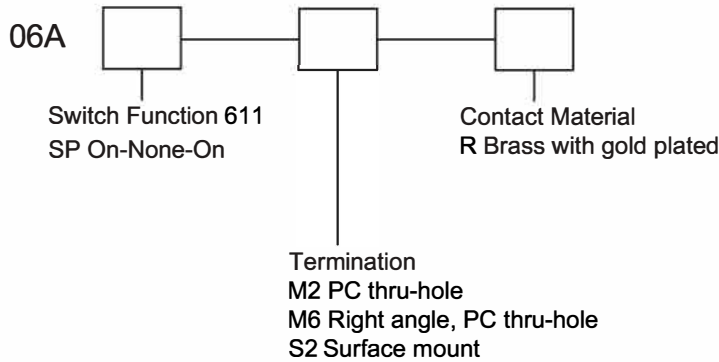


M2

P.C.MOUNTING



Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3

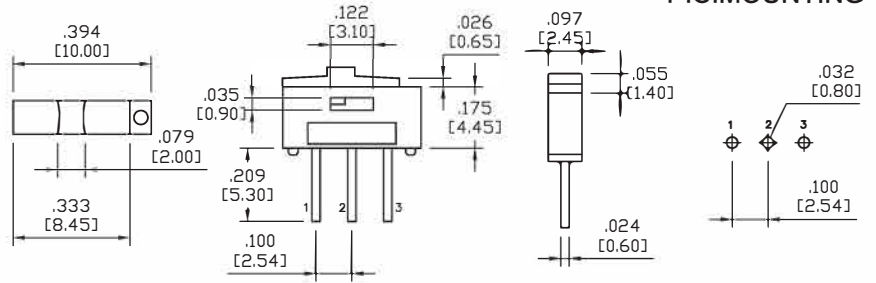


SPDT

M6

P.C.MOUNTING



Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3



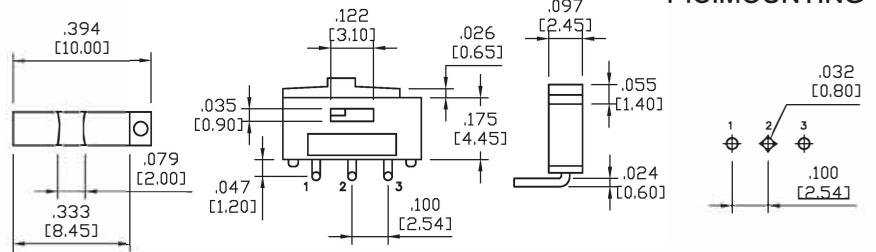


SPDT

S2

P.C.MOUNTING

Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3

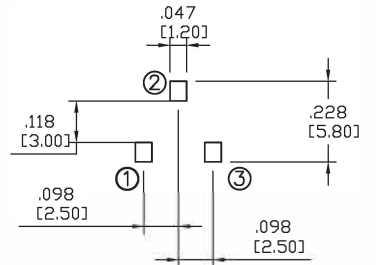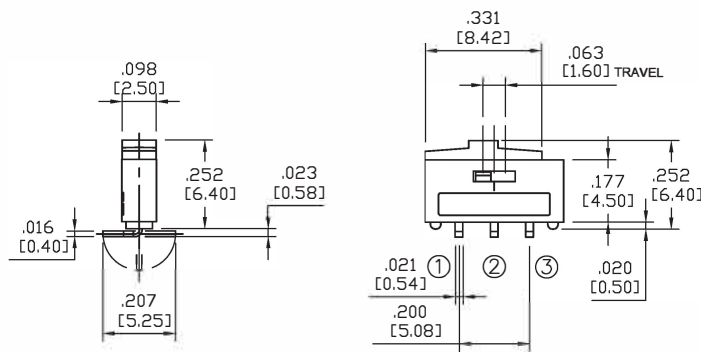

SPDT

CONTACT MATERIAL OPTIONS

Coding	Contact & Terminal Material	Rating	Agency Approvals
R	Brass with gold plating	0.5A @ 12VDC	