DWG. NO. JK-0557-A REV. "B"

PART NO. RJ-1002X-NL

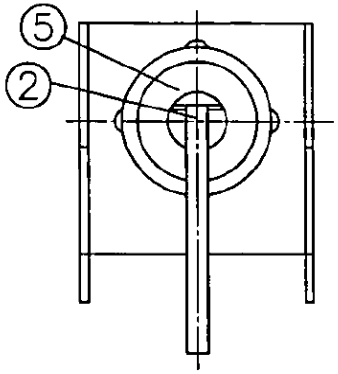

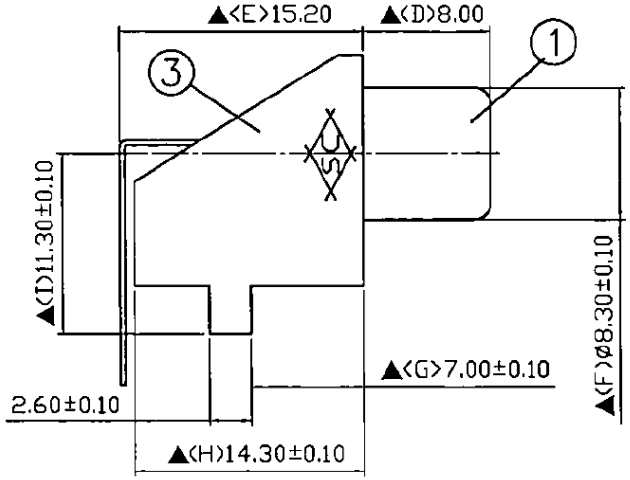

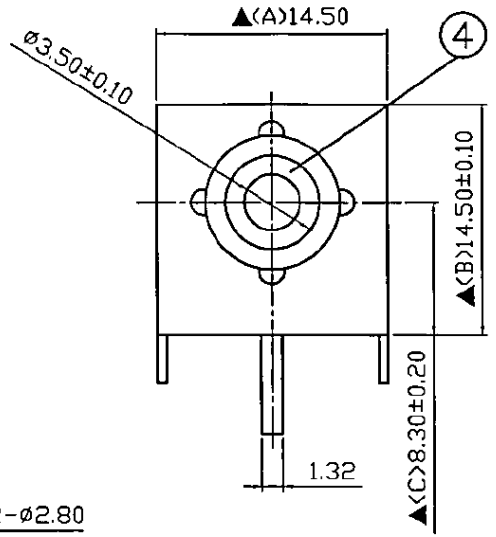



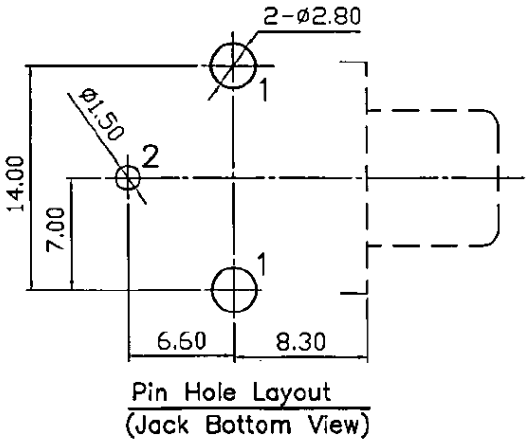

Pin Hole Layout
(Jack Bottom View)

SPECIFICATIONS :
CONTACT RESISTANCE : 30mΩ MAX.
INSULATION RESISTANCE : 100MΩ MIN.
AT DC500V
DIEIECTRIC WITHSTAND VOLTAGE :
AV 500V FOR ONE MINUTE
REMAK : ▲:
THE MOST IMPORTANT DIMENSION

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	INSULATOR B	CERAMIC	1	WHITE COLOR
4	INSULATOR A	BAKELITE	1	BLACK COLOR
3	SHELL 0.6T	LRON	1	TIN PLATED
2	TERMINAL	0.25T BRASS	1	TIN PLATED
1	BUSHING	0.3T LRON	1	NICKEL PLATED

MODEL NO.	RJ-1002B-NL	RJ-1002W-NL	RJ-1002Y-NL	RJ-1002R-NL
COLOR	BLACK	WHITE	YELLOW	RED

NOTES: ALL DIMS ARE IN mm

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
15-044	10/10/15	B	CHANGE THE PRODUCT DRAWINGS AND THE P/N NO.	BM	Tina
05-491	10/15/05	A	CHANGED THE PART TO RoHS COMPLIANT	VC	JY

PROJECTION

SCALE N/A

TOLERANCE EXCEPT AS NOTED
DEC. MILLIMETERS
0.0±0.30
0.00±0.20
0.000±0.10
ANG. N/A

RDI Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

TITLE
JACK-RoHS COMPLIANT

DR.	DATE	REF.	SHEET
JOEY	10/18/01	P/N: RJ-1002X-NL	1 OF 1

CK.	PRE-	DRAWING NO.	SIZE	REV.
SL	JK	0557	A	B

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.