DWG. NO. SW-2034-A REV. "A"

PART NO. RS33A-1-400-2P

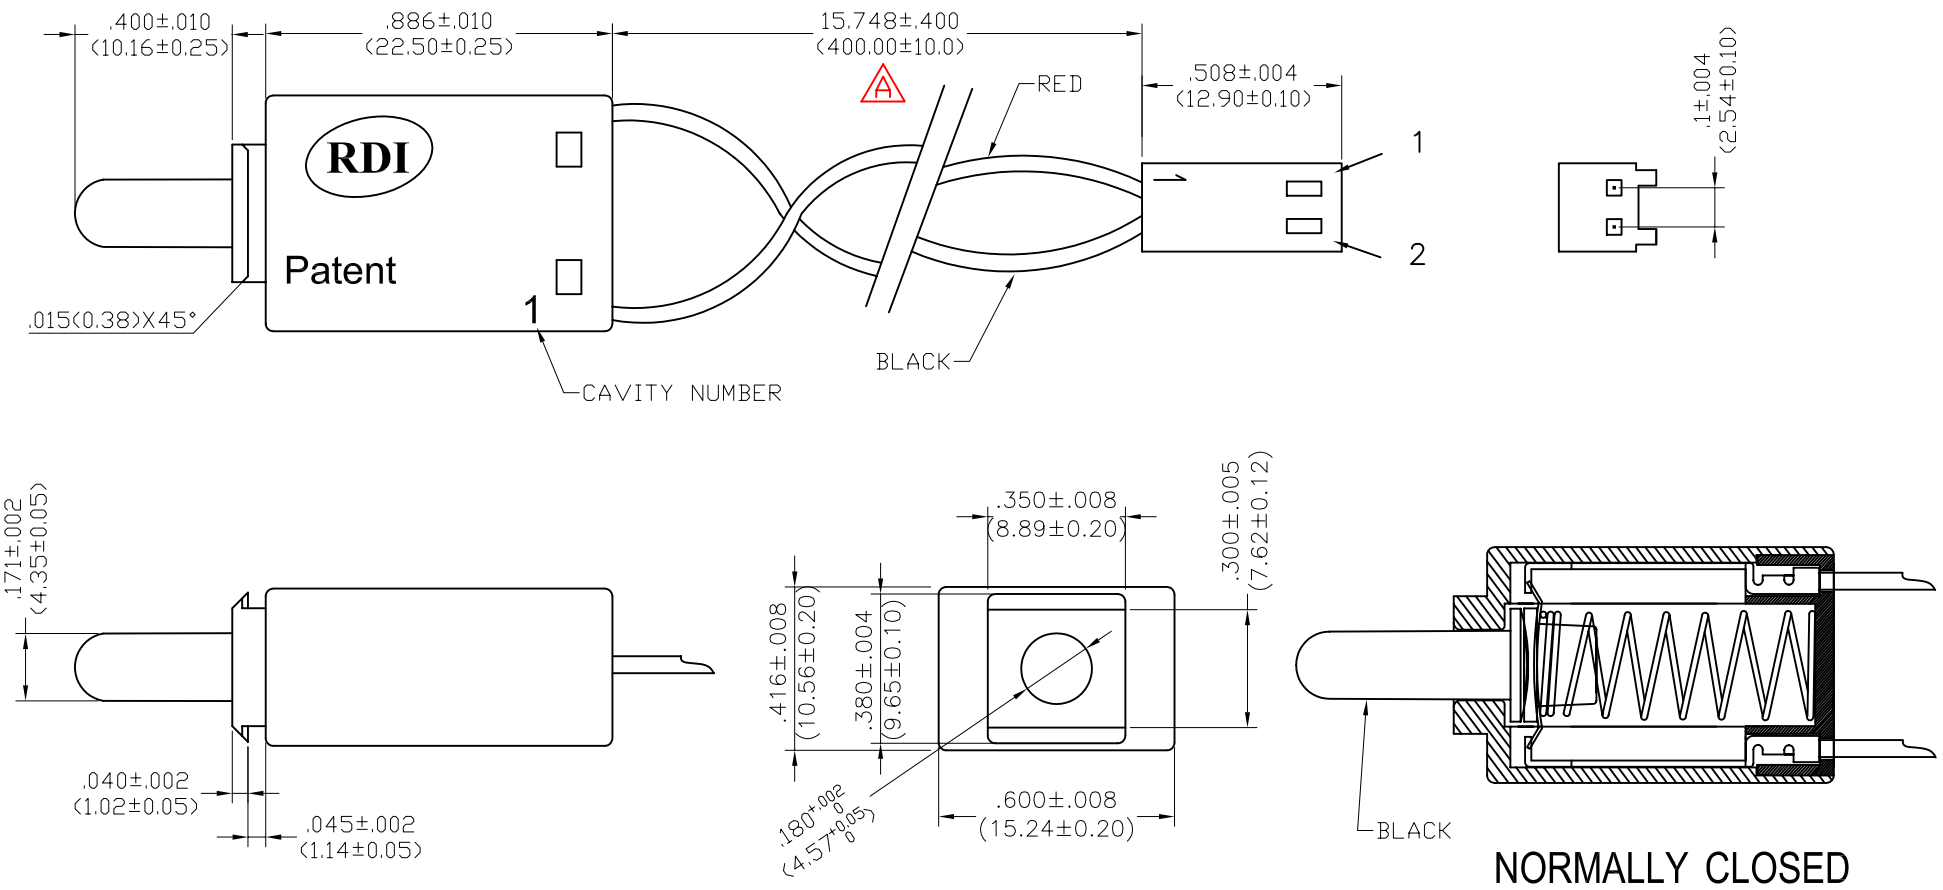

NORMALLY CLOSED

NOTE:
ACTUATION FORCE: 200± 50 GRAM FORCE
CONTACT RESISTANCE: 200 MINIOHM
WIRE LEADS: UL-1061 24AWG, 300V 80DEG C [RED/BLACK]

ALL DIMS ARE GIVEN IN inch (mm)

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
04-682	9/8/04	A	REVISED DIM. AS SHOWN (400 mm was 300 mm P.N. change accordingly)	BM	LL

PROJECTION

SCALE 2:1

TOLERANCE EXCEPT AS NOTED
DEC. MILLIMETERS
0 ±1.00
0.0 ±0.40
0.00 ±0.25
ANG. N/A

RDI Research Develop Innovate

RDI, Inc. 400 Columbus Avenue Valhalla, NY 10595

TITLE: INTRUSION SWITCH ASSEMBLY W/NORMALLY CLOSED

DR.	DATE	REF.
LUCIA	08/05/04	P/N: RS33A-1-400-2P

CK.	PRE-	DRAWING NO.	SIZE	REV.
SL	SW	2034	A	A

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.