DWG. NO. SW-3378-A REV. "D"

PART NO. RS33A1-235L-3P23-NL

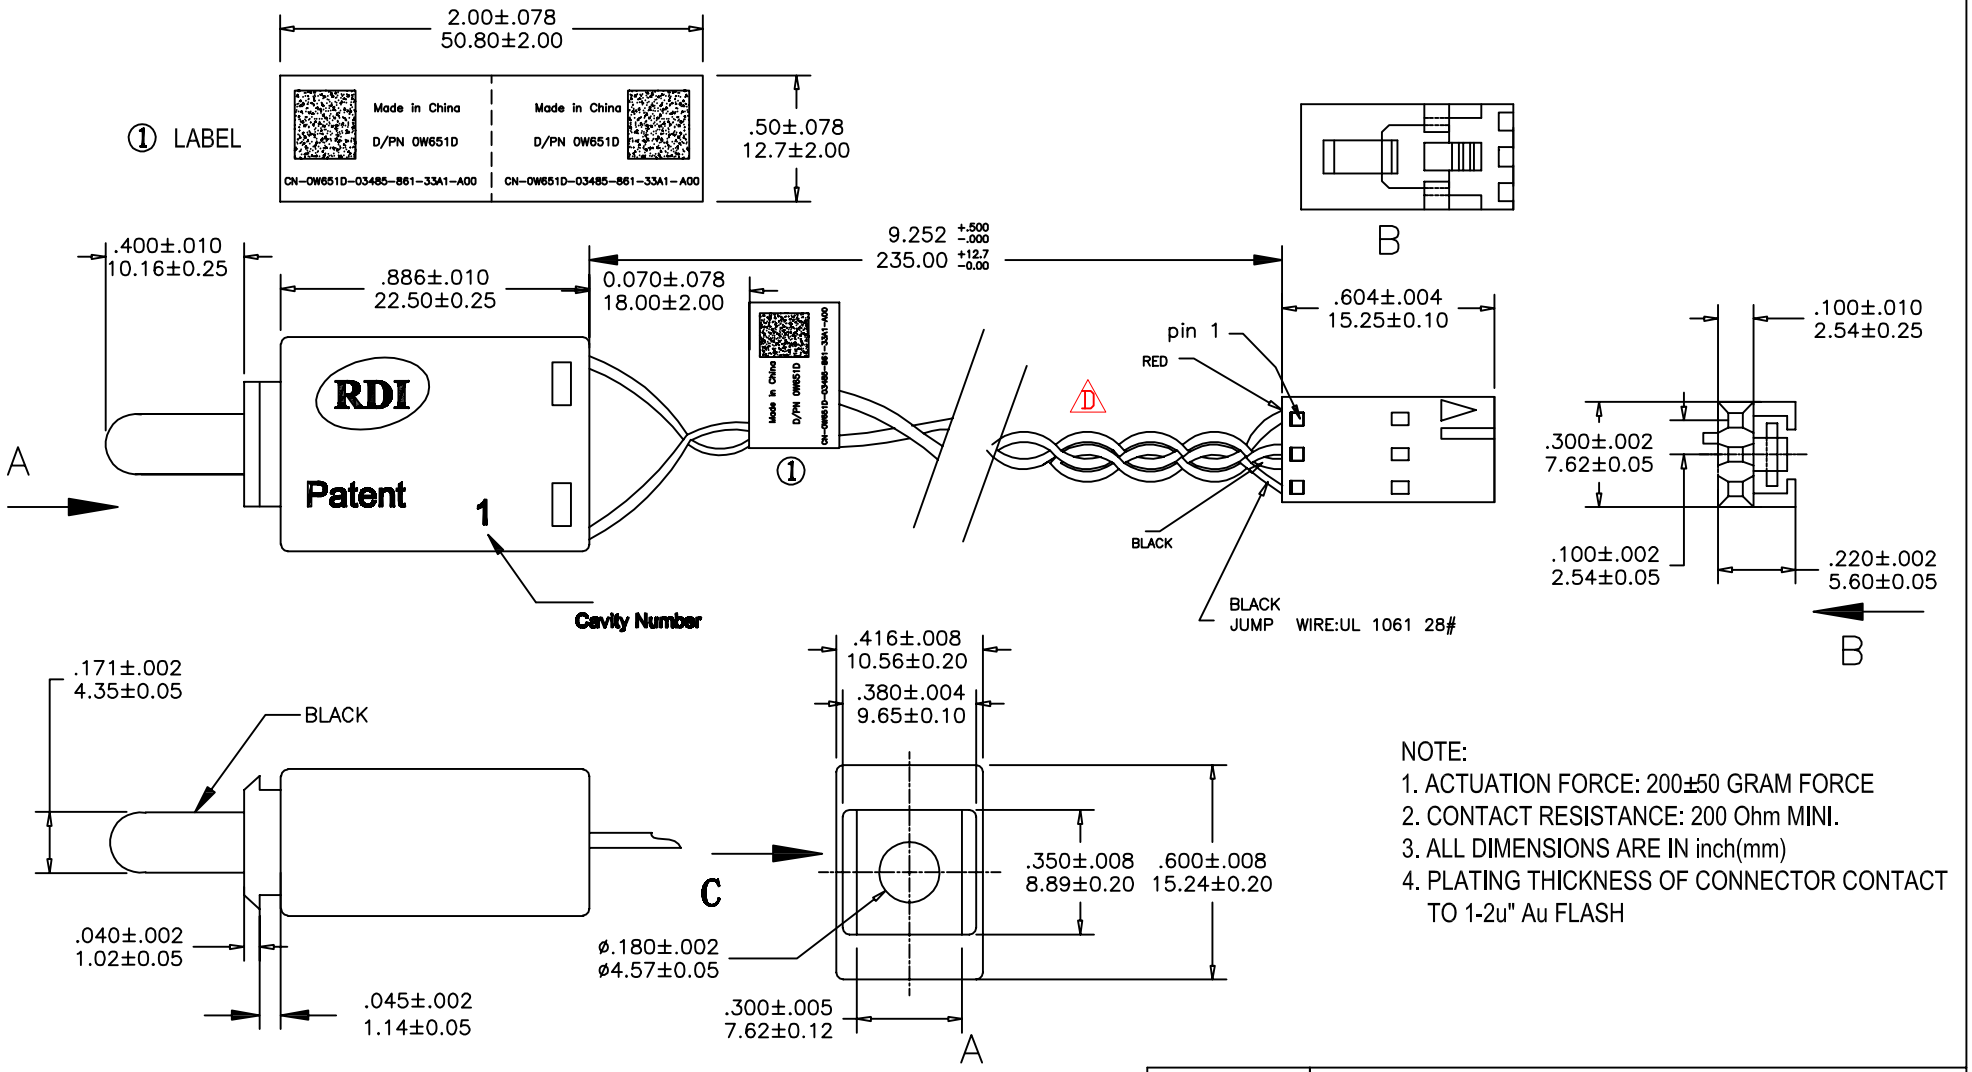

NOTE:
1. ACTUATION FORCE: 200±50 GRAM FORCE
2. CONTACT RESISTANCE: 200 Ohm MINI.
3. ALL DIMENSIONS ARE IN inch(mm)
4. PLATING THICKNESS OF CONNECTOR CONTACT TO 1-2u" Au FLASH

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
08-373	10/18/08	D	ADDED THE SHORTING LOOP WRAPPED AROUND WIRE HARNESS	BM	JY
08-317	08/27/08	C	CHANGED THE LABEL FROM X01 TO A00	BM	JY
08-237	06/26/08	B	REVISED THE PLATING OF NOTE 4	BM	JY
08-205	06/04/08	A	ADDED THE LABEL&ADDED NOTE #4&REMOVED NORMALLY CLOSED DRAWING	BM	JY

PROJECTION

SCALE N/A

TOLERANCE EXCEPT AS NOTED

DEC. MILLIMETERS
0 ±1.00
0.0 ±0.40
0.00 ±0.25

ANG. N/A

RDI Research Develop Innovate

RDI, Inc. 400 Columbus Avenue Valhalla, NY 10595

TITLE: INTRUSION SWITCH ASSY-RoHS COMPLIANT

DR.	DATE	REF.
Jin	02/20/08	P/N: RS33A1-235L-3P23-NL

CK.	PRE-	DRAWING NO.	SIZE	REV.
BM	SW	3378	A	D

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.