


PIN HOLE LAYOUT
(JACK BOTTOM VIEW)

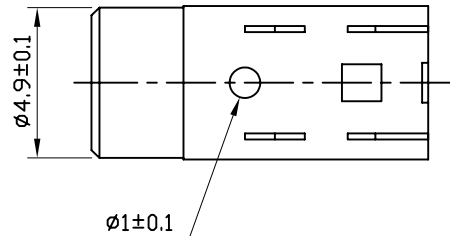

SPECIFICATIONS:
 1) CONTACT RESISTANCE:
 30m Ohm MAX.
 2) INSULATION RESISTANCE:
 100M Ohm MIN AT DC 500V
 3) DIELECTRIC WITHSTAND VOLTAGE:
 AC 500V FOR ONE MINUTE

4	HOUSING	POM	1	BLACK COLOR
3	TIP SPRING	0.2T PHOSPHOR BRONZE	1	SILVER PLATED
2	TIP SPRING	0.2T PHOSPHOR BRONZE	1	SILVER PLATED
1	EARTH TERMINAL	0.2T PHOSPHOR BRONZE	1	SILVER PLATED
ITEM	DESCRIPTION	MATERIAL	QTY	REMARK

PROJECTION **RDI** Research • Development • Innovation
 RDI, Inc. • 400 Columbus Avenue • Valhalla, NY 10595

SCALE	NONE	TITLE			Ø2.5 PHONEJACK-RoHS COMPLIANT
TOLERANCE EXCEPT AS NOTED	DR. JOEY	DATE 4/28/03	REF.	P/N: SCJ-0253-NL	
DEC. INCHES	N/A	CK. SL	PRE- JK	DRAWING NO. 1277	SIZE A
DEC. MILLIMETERS	±0.3	ANG.	±0.1°	REV. A	

NOTE:
ALL DIMS ARE GIVEN IN MM.

05-380	8/20/05	A	ADDED "-NL" TO THE END OF P/N	VF	JY
ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI. BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.