DWG. NO. MI-4896-F REV. "__1"

PART NO. RMM2718AB-38NL

Top View

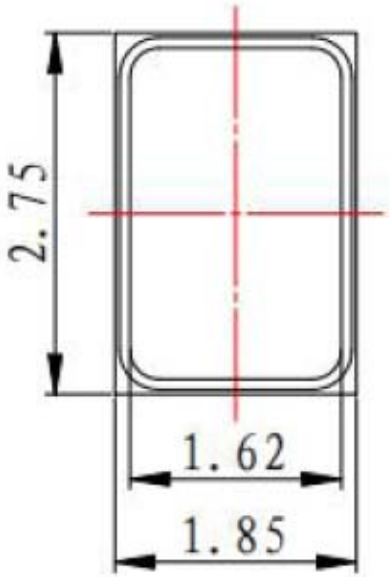

Side View

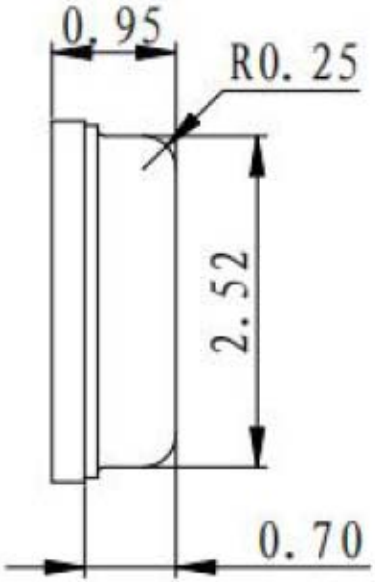

Bottom View

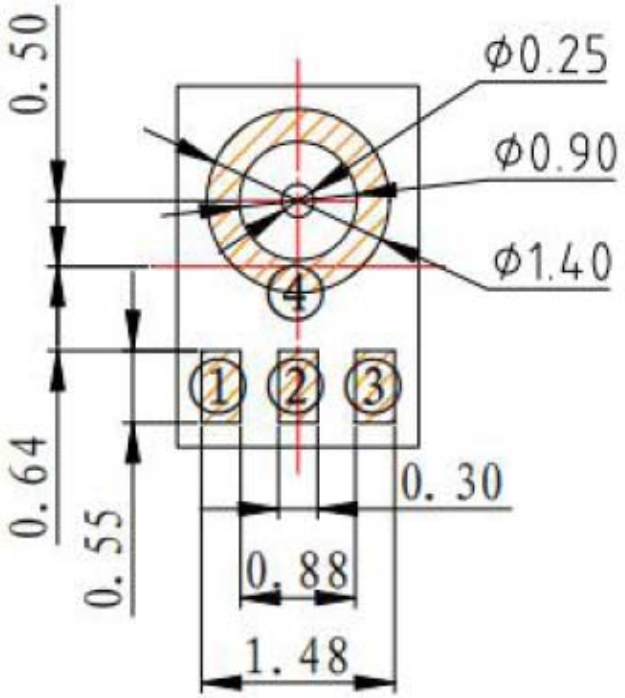

Note:
All dimensions are in millimeter(mm).
Tolerance： +/-0.1mm unless otherwise specified.
Weight： 0.02±10%g

Item	Dimension	Tolerance	Units
Length(L)	2.75	±0.10	mm
Width(W)	1.85	±0.10	mm
Height(H)	0.95	±0.10	mm
Acoustic port(AP)	Φ0.25	±0.10	mm

Pin Output	
Pin#	Function
1	Output
2	GND
3	V_{DD}
4	GND

NOTE: ALL DIMS ARE IN mm.

PROJECTION

RDI Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

SCALE N/A

TITLE
Analog MEMS microphone cartridge, bottom port, RoHS Compliant

TOLERANCE EXCEPT AS NOTED

DR. Tina | DATE 11/04/20 | REF. P/N: RMM2718AB-38NL | SHEET 1 OF 5

DEC. INCHES N/A

CK. BM | PRE- MI | DRAWING NO. 4896 | SIZE F | REV. __1

DEC. MILLIMETERS ±0.5

ANG. N/A

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

Mechanical Specifications

Vacuum nozzle pickup location

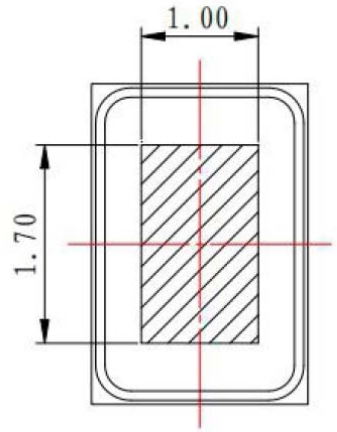

Recommended area for vacuum nozzle pickup location

Example solder stencil pattern

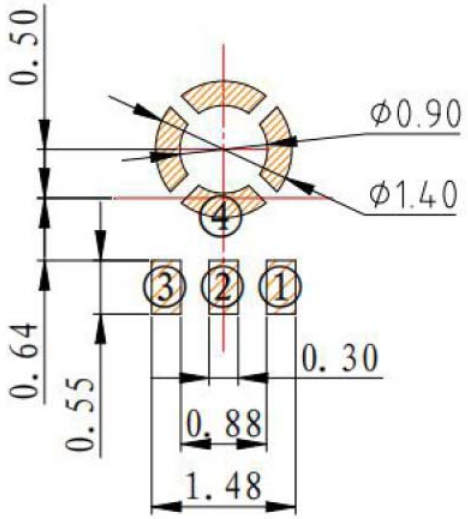

1. Acoustic and Electrical Characteristics

(Test Conditions: 23±2°C, 55±20% R.H)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Directivity	D(θ)	Omni-Directional				
Sensitivity	S	94dB SPL @1KHz	-41	-38	-35	dB
Supply Voltage	V_{DD}		1.6	2.0	3.6	V
Current Consumption	I_{DSS}	V_{DD}=2.0V		80		uA
S/N Ratio	S/N	94dB SPL @1KHz (A-weighted)		65		dB
Total Harmonic Distortion	THD	94dB SPL @1KHz		0.2		%
Acoustic Overload Point	AOP	10% THD @ 1 kHz		130		dBSPL
Output Impedance	ZOUT	@1KHz			300	Ω

NOTE: ALL DIMS ARE IN mm.

PROJECTION	RDI Research Develop Innovate RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549			
SCALE N/A	TITLE: Analog MEMS microphone cartridge, bottom port, RoHS Compliant			
TOLERANCE EXCEPT AS NOTED	DR. Tina	DATE 11/04/20	REF. P/N: RMM2718AB-38NL	SHEET 2 OF 5
DEC. INCHES N/A	CK. BM	PRE- MI	DRAWING NO. 4896	SIZE F	REV. __1
DEC. MILLIMETERS ±0.5	THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.			
ANG. N/A				

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

Mechanical Specifications

2. Frequency Response Curve

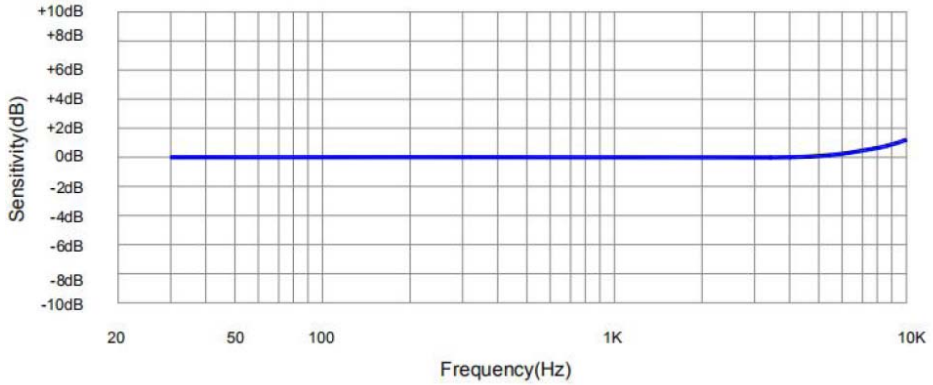

3. Recommended Interface Circuit

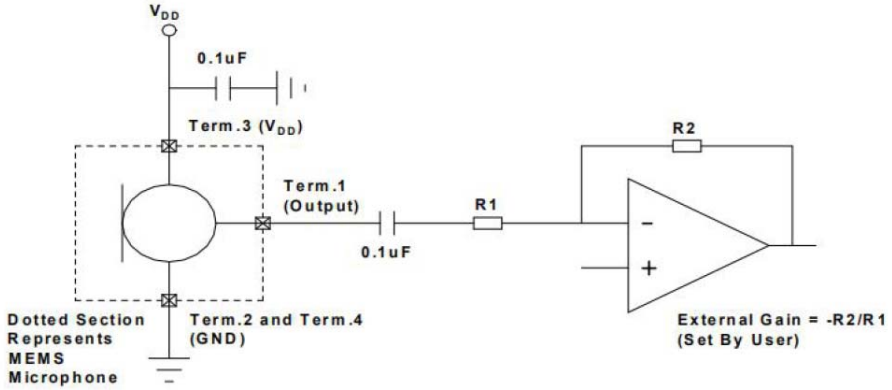

4. Test Setup Drawing

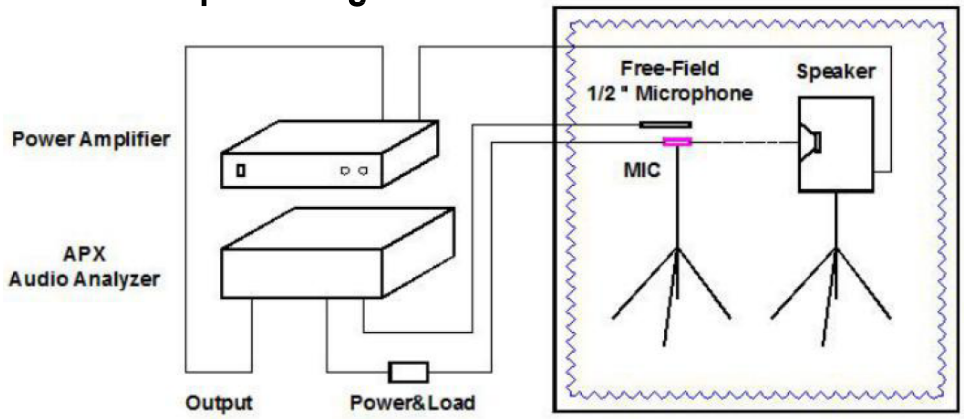

5. Reflow Guarantee

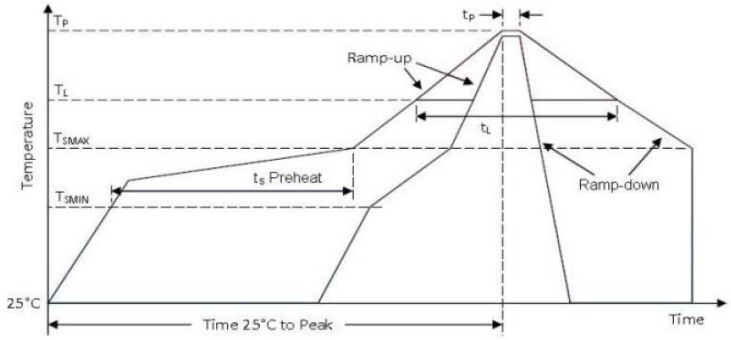

Profile Feature	Pb-Free
Average Ramp-up rate (T_{SMAX} to T_P)	3℃/second max.
Preheat Temperature Min (T_{SMIN}) Temperature Max (T_{SMAX}) Time (T_{SMIN} to T_{SMAX}) (t_S)	 150℃ 200℃ 60-180 seconds
Time maintained above: Temperature (T_L) Time (t_L)	 217℃ 60-150 seconds
Peak Temperature (T_P)	260℃
Time within 5℃ of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down rate(T_P to T_{SMAX})	6℃/second max
Time 25℃ to Peak Temperature	8 minutes max

Notes:

1. Vacuuming over acoustical hole of the microphone is not allowed, because the Devices can be damaged by vacuum.
2. Washing the board after reflow process is not allowed, because board washing and Cleaning agents can damage the device. A device should not be exposed to ultrasonic processing or cleaning.
3. Recommended number of reflow is no more than 5 times.

NOTE: ALL DIMS ARE IN mm.

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

PROJECTION

RDI Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

SCALE N/A

TITLE: Analog MEMS microphone cartridge, bottom port, RoHS Compliant

TOLERANCE EXCEPT AS NOTED

DR. Tina | DATE 11/04/20 | REF. P/N: RMM2718AB-38NL | SHEET 3 OF 5

DEC. INCHES N/A

CK. BM | PRE- MI | DRAWING NO. 4896 | SIZE F | REV. __1

DEC. MILLIMETERS ±0.5

ANG. N/A

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.

Mechanical Specifications

6. Packaging Specifications

6.1. Tape Specification

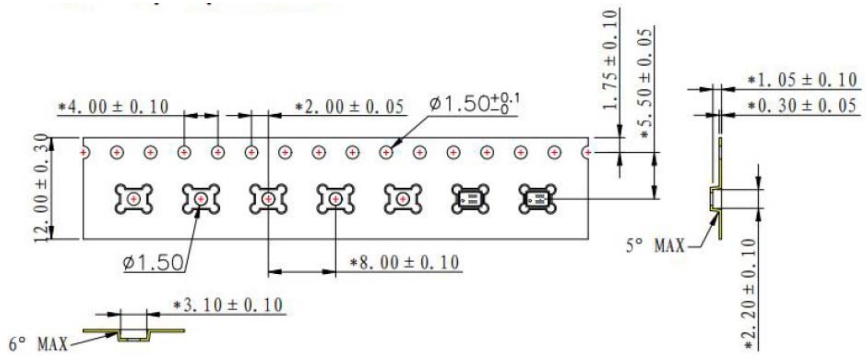

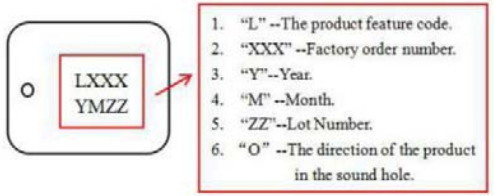

1. "L" --The product feature code.
2. "XXX" --Factory order number.
3. "Y"--Year.
4. "M" --Month.
5. "ZZ"--Lot Number.
6. "O" --The direction of the product in the sound hole.

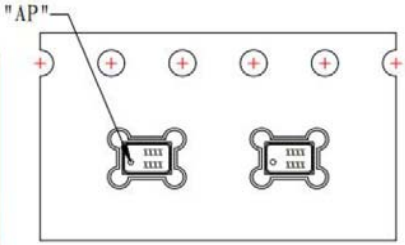

6.2. Reel Dimension

13" reel dimensions (unit:mm)

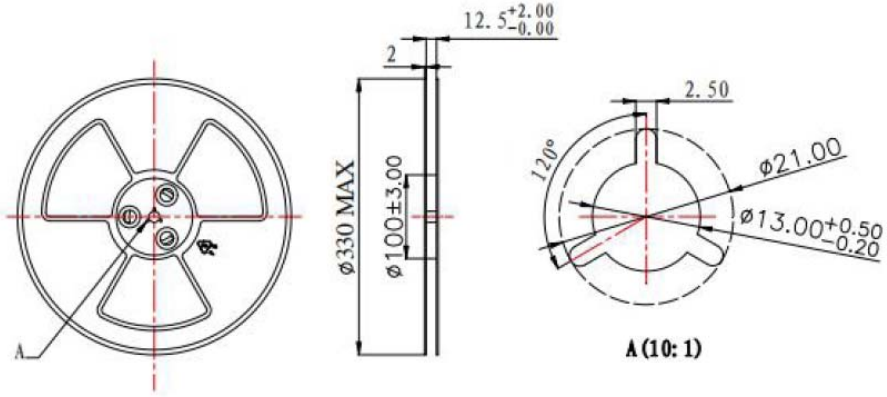

6.3. The Content of Box(13" reel)

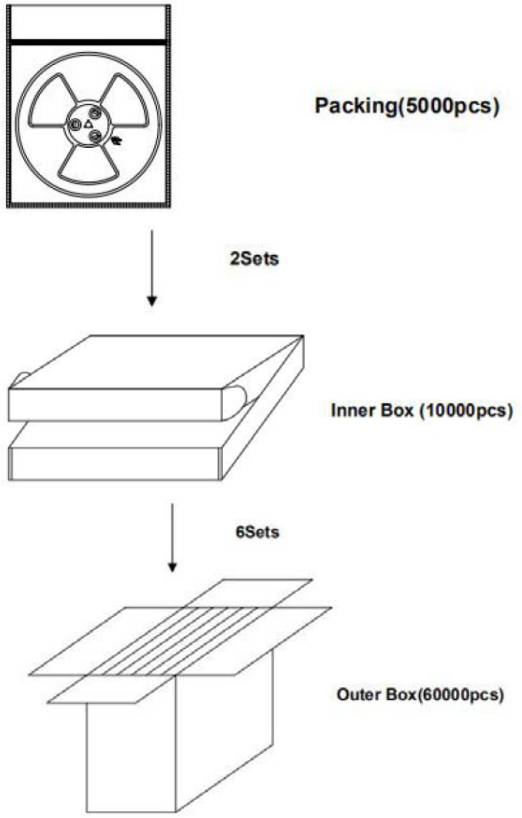

Qty/ Reel	Qty/ One Inner Box	Qty/ Outer Box（Six Inner Box）
5000 pcs	10,000 pcs	60,000 pcs
Φ330mm	355×340×45mm	365×290×370mm

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY

PROJECTION

RDI Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

SCALE N/A

TITLE Analog MEMS microphone cartridge, bottom port, RoHS Compliant

TOLERANCE EXCEPT AS NOTED

DR. Tina | DATE 11/04/20 | REF. P/N: RMM2718AB-38NL | SHEET 4 OF 5

DEC. INCHES N/A

CK. BM | PRE- MI | DRAWING NO. 4896 | SIZE F | REV. __1

DEC. MILLIMETERS ±0.5

ANG. N/A

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.

Mechanical Specifications

7. Storage and Transportation

a) Keep MEMS MIC in warehouse with less than 75% humidity and without sudden temperature change, acid air, any other harmful air or strong magnetic field.

b) Recommend storage period no more than 1 year and floor life(out of bag) atfactory no more than 4 weeks.

c) The MEMS MIC with normal pack can be transported by ordinary conveyances. Please protect products against moist, shock, sunburn and pressure during transportation.

d) Storage Temperature Range： -40℃～+70℃ （Microphone units with package）

e) Operating Temperature Range： -40℃～+100℃

8. Reliability Specifications

Note： The microphone sensitivity after stress must deviate by no more than ±3dB from the initial value.

Test Item	Detail
Thermal Shock Test	100 cycles of air-air thermal shock from-40℃ to +105℃ with 15 minute soaks.
High Temperature Test	+105℃ environment while under bias for 240 hours.
Low Temperature Test	-40℃ environment while under bias for 240 hours.
Humidity Test	+85℃/85% R.H. environment while under bias for 240 hours.
Vibration Test	16 minutes in each X, Y, Z axis from 20 to 2,000 Hz with peak acceleration of 20G
Drop Test	1.5-meter height onto a concrete surface each time at three directions in state of packaging.
Reflow Test	5 reflow cycles with peak temperature of +260℃.
ESD Test	Under C=150pF, R=330ohm. Tested to ±8KV contact to the case and tested to ±2kV contact to I/O terminals.10 times. Grounding.

NOTE: ALL DIMS ARE IN mm.

PROJECTION	RDI Research Develop Innovate RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549			
SCALE N/A	TITLE: Analog MEMS microphone cartridge, bottom port, RoHS Compliant			
TOLERANCE EXCEPT AS NOTED	DR. Tina	DATE 11/04/20	REF. P/N: RMM2718AB-38NL	SHEET 5 OF 5
DEC. INCHES N/A	CK. BM	PRE- MI	DRAWING NO. 4896 / SIZE F	REV. __1
DEC. MILLIMETERS ±0.5	THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.			
ANG. N/A				

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY