



P.C.B. LAYOUT

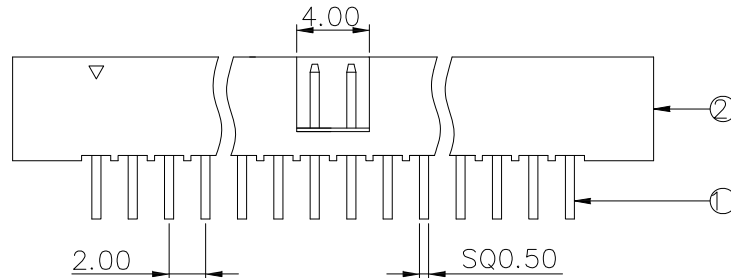

L=10.95/14.95 mm

NOTES: ALL DIMS ARE IN mm

ITEM	Part name	Material	Description	Q'TY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds. Initial : 1000MΩ Min. After Test : 500MΩ Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20mΩ Max. After Test : 40mΩ Max.	XX

Temperature Rating : -40°C ~ +125°C
Dielectric Withstanding Voltage : 1000V AC / Min


RDI PN : 233-XX-PP-N-NL

XX= No of contacts 06-68

PP= Plating : 00= Gold flash, 01= Selective gold flash,
15= 15μ" gold, 30= 30μ" gold

N= NY-6T, UL94V-0

PROJECTION



SCALE
N/A

TOLERANCE
EXCEPT AS NOTED
DEC. MILLIMETERS
0.0±0.30
0.00±0.20
0.000±0.10



Research Develop Innovate

RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549

TITLE

Box Header, 90°, 2.00mm pitch, RoHS Compliant

DR. Tina	DATE 07/16/19	REF. P/N: 233-XX-PP-N-NL	SHEET 1 OF 1
CK. BM	PRE- C	DRAWING NO. 4937	SIZE A

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY	ANG. N/A
------	------	-----	-----------------	------	----	----------