

窗口面贴麦拉

共面度0.1mm以内

RDI PN : 3036V-88X-NL
 X= Contact plating- 1=1μ", 2=3μ", 3=6μ", 4=15μ", 5=30μ", 6=50μ"

SPECIFICATIONS :

1. ELECTRICAL :


- 1.1 Voltage Rating : 125 VAC RMS.
- 1.2 Current Rating : 1.5 AMP.
- 1.3 Contact Resistance : 30 mΩ MAX.
- 1.4 Insulation Resistance : 500 MΩ MIN @500NDC.
- 1.5 Dielectric Material : 1000 V AC RMS 50Hz OR 60Hz,1 MIN.

2. MATERIAL :

- 2.1 Housing : PLC UL 94V-0
- 2.2 Contact : Diameter 0.45mm Phosphor Bronze
Gold Plating Over Nickel.
- 2.3 Mating/Unmating Force : 2.2 Kgf MAX.
- 2.4 Retention Strength : 7.7 Kgf MIN Between Jack and Plug.
- 2.5 Operating Life : 750 Cycles MIN.

3. ENVIRONMENTAL :

- 3.1 Storage : -40°C ~ +85°C Relative Humidity <70%
- 3.2 Operation : -40°C ~ +85°C

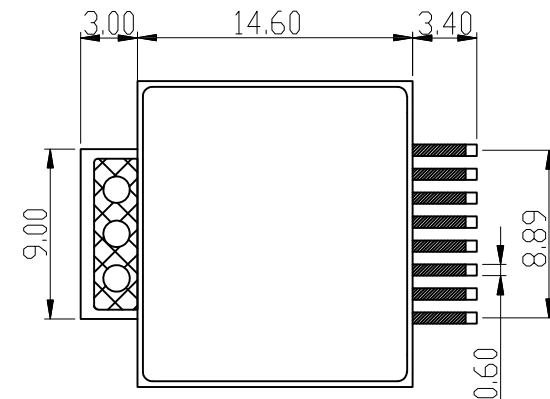

PCB Layout / Top View
 Tolerance : ±0.05

NOTE: ALL DIMS ARE IN mm.

PROJECTION		RDI Research Develop Innovate RDI, Inc. 333 North Bedford Road, Suite 135, Mount Kisco, NY 10549		
SCALE UNDEFINED	TITLE 8P8C single port vertical jack, SMT, RoHS Compliant			
TOLERANCE EXCEPT AS NOTED	DR. Tina	DATE 08/26/19	REF. P/N: 3036V-88X-NL	SHEET 1 OF 1
DEC. MILLIMETERS .XX±0.10 .XX±0.25 .XXX±0.35	CK. BM	PRE- JK	DRAWING NO. 4969	SIZE A
THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI, BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.				
ANG. .X±3.0°				

ECN#	DATE	SYM	REVISION RECORD	AUTH	BY
------	------	-----	-----------------	------	----